

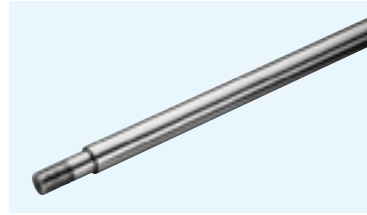


SFW-FS115 TYPE

– Format Single End Threaded Inch Shafts –

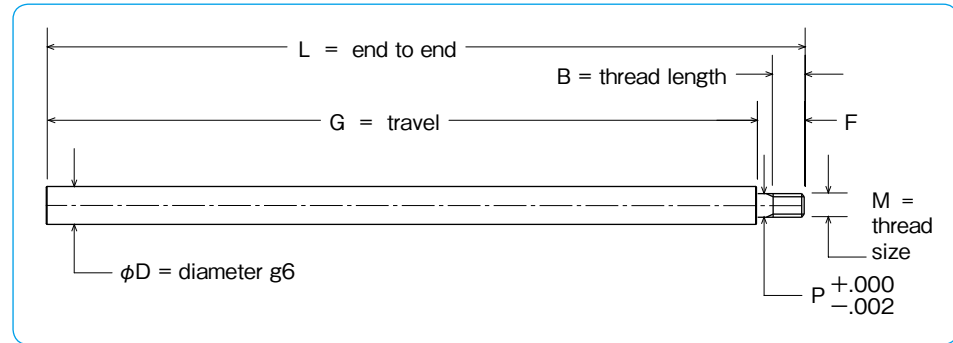

part number structure

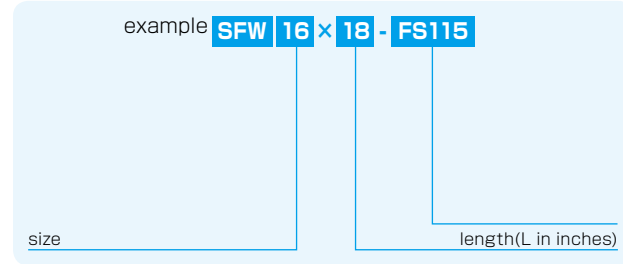


Part Number	Outer Diameter		Thread Size M	Thread Length B	Journal Length F	Journal DIA P	4" Travel G	6" Travel G	8" Travel G	12" Travel G	24" Travel G	36" Travel G	48" Travel G
	D	inch/mm					Length L	Length L	Length L	Length L	Length L	Length L	
SFW 6-FS115	3/8	—5	1/4-20	0.31	0.50	0.250	4.500	6.500	8.500	12.500	24.500		
	9.525	—14					114.3	165.1	215.9	317.5	622.3		
SFW 8-FS115	1/2	—0002	5/16-18	0.39	0.63	0.313	4.625	6.625	8.625	12.625	24.625		
	12.700	—0007					117.5	168.3	219.1	320.7	625.5		
SFW 10-FS115	5/8	—6	3/8-16	0.47	0.75	0.375	4.750	6.750	8.750	12.750	24.750		
	15.875	—17					120.7	171.5	222.3	323.9	628.7		
SFW 12-FS115	3/4	—0003	1/2-13	0.63	1.00	0.500	5.000	7.000	9.000	13.000	25.000		
	19.050	—0008					127.0	177.8	228.6	330.2	635.0		
SFW 16-FS115	1	—7	5/8-11	0.78	1.25	0.625		7.250	9.250	13.250	25.250	37.250	
	25.400	—20					184.2	235.0	336.6	641.4	946.2		
SFW 20-FS115	1-1/4	—0004	3/4-10	0.94	1.50	0.750		7.500	9.500	13.500	25.500	37.500	
	31.750	—0010					190.5	241.3	342.9	647.7	952.5		
SFW 24-FS115	1-1/2	—9	1-8	1.25	2.00	1.000		10.000	14.000	26.000	38.000	50.000	
	38.100	—25					25.40	355.6	660.4	965.2	1270.0		



material: Equivalent to SUJ2
 hardness: 60 HRC or more
 tolerances: g6 or to be specified
 stainless steel sizes are available on this series by quote only
 Product of NB Corporation of America

SFW-FS116 TYPE

– Format Both Ends Threaded Inch Shafts –

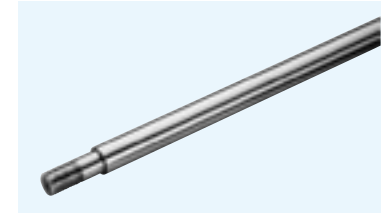

part number structure

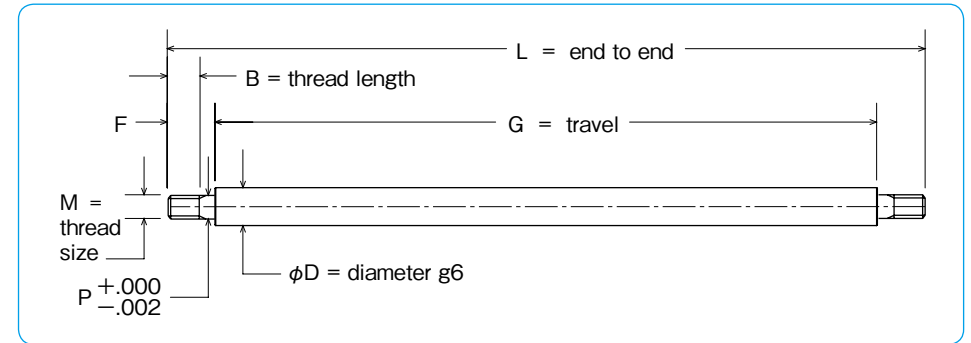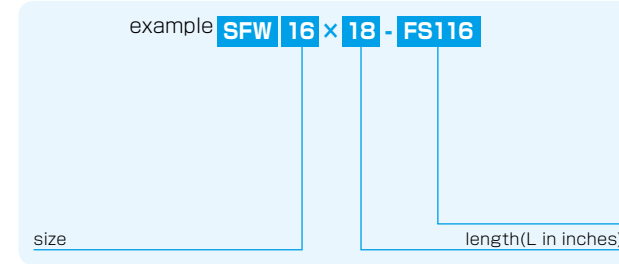

Part Number	Outer Diameter		Thread Size M	Thread Length B	Journal Length F	Journal DIA P	4" Travel G	6" Travel G	8" Travel G	12" Travel G	24" Travel G	36" Travel G	48" Travel G
	D	inch/mm					Length L	Length L	Length L	Length L	Length L	Length L	
SFW 6-FS116	3/8	—5	1/4-20	0.31	0.50	0.250	4.500	6.500	8.500	12.500	24.500		
	9.525	—14					114.3	165.1	215.9	317.5	622.3		
SFW 8-FS116	1/2	—0002	5/16-18	0.39	0.63	0.313	4.625	6.625	8.625	12.625	24.625		
	12.700	—0007					117.5	168.3	219.1	320.7	625.5		
SFW 10-FS116	5/8	—6	3/8-16	0.47	0.75	0.375	4.750	6.750	8.750	12.750	24.750		
	15.875	—17					120.7	171.5	222.3	323.9	628.7		
SFW 12-FS116	3/4	—0003	1/2-13	0.63	1.00	0.500	5.000	7.000	9.000	13.000	25.000		
	19.050	—0008					127.0	177.8	228.6	330.2	635.0		
SFW 16-FS116	1	—7	5/8-11	0.78	1.25	0.625		7.250	9.250	13.250	25.250	37.250	
	25.400	—20					184.2	235.0	336.6	641.4	946.2		
SFW 20-FS116	1-1/4	—0004	3/4-10	0.94	1.50	0.750		7.500	9.500	13.500	25.500	37.500	
	31.750	—0010					190.5	241.3	342.9	647.7	952.5		
SFW 24-FS116	1-1/2	—9	1-8	1.25	2.00	1.000		10.000	14.000	26.000	38.000	50.000	
	38.100	—25					25.40	355.6	660.4	965.2	1270.0		

material: Equivalent to SUJ2
 hardness: 60 HRC or more
 tolerances: g6 or to be specified
 stainless steel sizes are available on this series by quote only
 Product of NB Corporation of America